


VOCASN

Technical Specifications



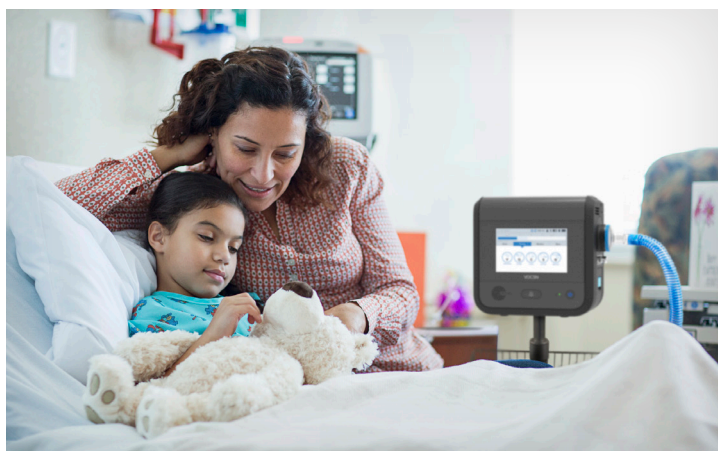

VOCSN Tech Specs

Five therapies. One device.

VOCSN integrates five separate devices including a ventilator, oxygen concentrator, cough assist, suction, and nebulizer, into one multi-function ventilator for hospital, institutional, transport, and home environments. VOCSN is controlled with an intuitive touchscreen operating system to deliver treatments in seconds instead of minutes.

CUSTOMIZABLE THERAPY CONFIGURATIONS

VOCSN is customizable to each patient. VOCSN can include all five therapies or just the mix of therapies needed, scaling with patient need.



Simple

- Ventec One-Circuit™
- Intuitive touchscreen operation
- Quick and easy setup



Mobile

- Five therapies in one device
- 70% lighter and smaller than five devices
- Up to 9 hours of on-board battery



Care Changing

- Touch Button Cough™
- Uninterrupted ventilation between therapies
- Designed to reduce risk of circuit misconnects

VOCSN System Tech Specs

Patients

- Invasive and non-invasive ventilation (including mouthpiece)
- Adult and pediatric patients greater than 5 kg

Clinical Environments

Hospitals

- Emergency departments
- Step-down units
- Military hospitals

Institutions

- Long term acute care (LTAC)
- Skilled nursing facilities
- Long-term care/nursing homes

Transport

- Inter-hospital
- Intra-hospital
- Emergency medical services
- Military transport

Home Care

- Home healthcare
- Home based transport

Alarm Volume

- 65 to 85 decibels

Battery Power

- Up to 9 hours of continuous use (ventilation only)
 - 2 external hot swappable lithium-ion batteries (5,800 mAh each)
 - 1 Internal battery (3,900 mAh)
- Note: Simultaneous use of therapies will decrease battery operating time

Clinician Lock to Restrict User Access to Settings

- On/Off
- Permissions feature can be enabled to allow certain settings to be adjusted

Enable and Disable Therapies


- Enable/Disable any of the five therapies based on patient needs

Power Sources

- AC (wall plug-in)
- DC (wheelchair and external batteries)
- VOCSN Batteries (3 batteries: 15,500 mAh total)

External Power Requirements

- AC Power:
 - Sine AC mains waveform
 - Rated Voltage: 100 to 240 VAC, 50 to 60 Hz
 - Power for V+O+C+S+N(+Pro): ≤288 VA average, 420 VA peak
 - Power for V+C(+Pro): ≤180 VA average, 240 VA peak
- DC Power:
 - 20.0 to 30.3 VDC, as measured at the connection to the device, through 0 to 350 W instantaneous loads
 - Power for V+O+C+S+N(+Pro): ≤200 W average, 350 W peak
 - Power for V+C(+Pro): ≤150 W average, 200 W peak
 - Intended for connection to 24 V (27.2 VDC typical) batteries
 - Female XLR3 connection port with the following pin configuration:



- Pin 1 Signal: V+
- Pin 2 Signal: RTN
- Pin 3 Signal: N/A (Unused)

Dimensions

- Width: 10.25 inch (26 cm)
- Height: 11 inch (28 cm)
- Depth: 7.5 inch (19 cm)

User Interface

- 7 inch (17.75 cm) easy to use color LCD touchscreen

Weight (w/batteries)

- V+O+C+S+N+Pro: 18.3 lbs (8.3 kg)
- V+O+C+S+N: 18.1 lbs (8.3 kg)
- V+C+Pro: 14 lbs (6.4 kg)
- V+C: 12.5 lbs (5.7 kg)

Operating Environment

- Temperature: 5 °C to 40 °C
- Humidity: 15% to 90% (non-condensing)
- Atmospheric: 700 to 1060 hPa


Electromagnetic Compatibility and Protection

- IEC 60601-1-2
- Additional ESD levels: ±8 kV contact / ±15 kV air
- Additional Radiated RF Immunity level: 20 V/m
- Additional Magnetic Fields level: 30 A/m
- Tested for RFID immunity



Ventec One-Circuit™

The Ventec One-Circuit™ allows patients to switch between therapies with the touch of a button. Rather than several cumbersome tubes connecting to separate devices, the Ventec One-Circuit™ eliminates clutter to create one easy-to-manage system for comfort and peace of mind.

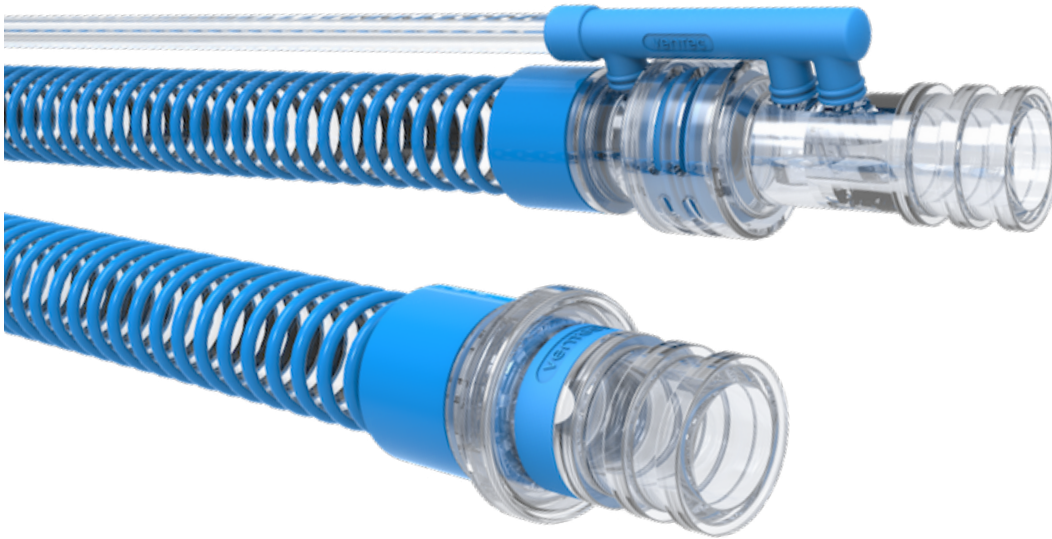

Ventec One-Circuit™ Specs

Circuits – Single Limb

- Active Circuit with integrated flow transducer, drive, and proximal flow sense lines and compatible with Touch Button Cough™
- Passive Circuit compatible with Touch Button Cough™ therapy
- Mouthpiece
- Valveless compatible for masks


Size

- 19 mm (adult)
- 15 mm (pediatric)

Circuit Options


- Humidifier Bypass (cough therapy)
- Secretion Trap (cough therapy)
- Integrated Oxygen Direct™ Tube (oxygen therapy)
- Heated circuit for use with humidifier
- VOCSN integrated bacterial filter

Circuit Highlighted Technology

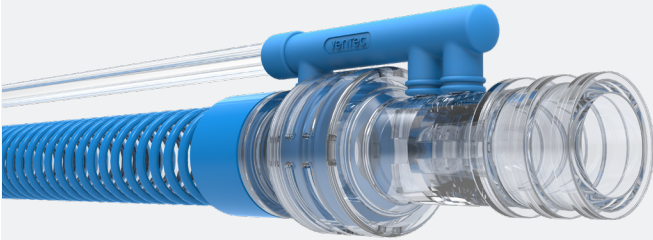

ACTIVE CIRCUIT

The inline design and dual bellows of the active circuit provide the performance of an active valve with the size and convenience of a passive valve. The patent pending valve design supports cough and ventilation functions in a single circuit and combines the drive and sense lines into a single trilumen tube. Additionally, VOCSN uses advanced software technology to help prevent historical problems associated with condensation to optimize Vte sensing, accuracy, and triggering by purging condensation on every breath.

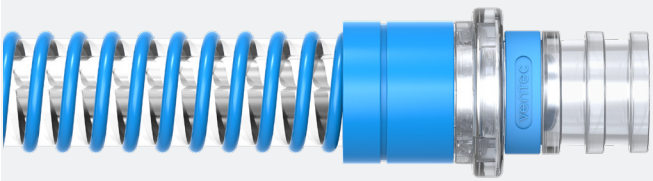


PASSIVE CIRCUIT

The Ventec passive circuit is light, small, and easy to use. Our unique passive valve is designed to close the leak during cough exsufflation, thus making Touch Button Cough™ possible without changing circuits.



Circuit Highlighted Technology

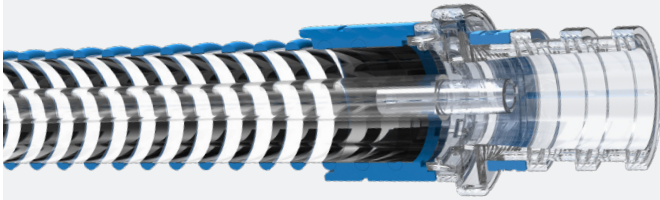


OXYGEN DIRECT™

The Oxygen Direct™ system minimizes oxygen lost to leaks and dead space, improves battery life, and makes using supplemental oxygen easier. VOCSN includes advanced pulse dose technology and an independent O₂ tube inside the patient circuit. The system delivers oxygen directly to the patient interface during the first two thirds of the patient's breath, when the patient needs oxygen most.



VENTEC HUMIDIFIER BYPASS

The Ventec Humidifier Bypass allows the patient to remain connected to the humidifier while using the Touch Button Cough™ therapy. The bypass attaches to the humidifier water chamber to allow humidified air to reach the patient during ventilation and insufflation. Then, during exsufflation, check valves redirect the flow of air to bypass the water chamber of the humidifier.

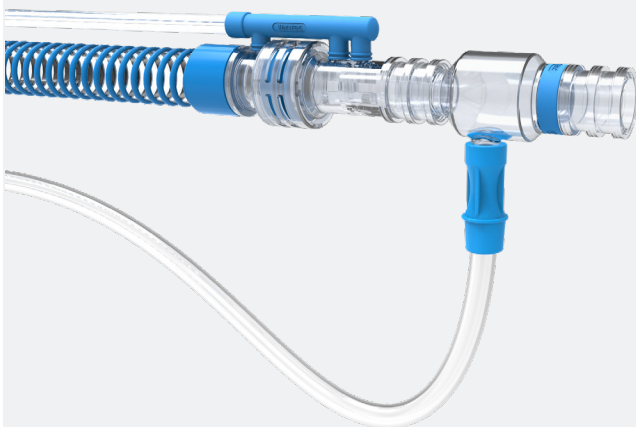

VENTEC SECRETION TRAP

The Secretion Trap is added to the circuit to capture mucus after the cough and helps to make the Touch Button Cough™ possible. As mucus enters the trap, the VOCSN suction system removes mucus from the circuit.

Ventilation

VOCSN brings next generation technology, breathing comfort, and ease of use to ventilator patients.

The VOCSN critical care ventilator provides invasive, noninvasive, and mouthpiece ventilation. Designed to work in hospital, institutional, transport, and home environments, VOCSN delivers a comprehensive set of ventilation modes and settings to meet patient needs. The advanced unified respiratory system combines responsive leak and circuit compensation as well as precision flow trigger controls to enable comfortable breathing and accurate therapy.



Highlighted Technology

READY FOR HOSPITALS, TRANSPORT, AND EMERGENCY APPLICATIONS

Using a customized radial blower and advanced software, VOCSN meets the rigorous ISO 80601-2-12 international standard for critical-care ventilators.

CIRCUIT COMPENSATION

Typically only found in critical care ventilators, circuit compensation helps overcome lost volume in the patient circuit. This technology improves airflow delivery accuracy during volume ventilation, which is especially important for pediatric patients.

THERAPY TRACKER

The integrated Therapy Tracker records alarms and all changes to settings to the ventilator as well as all ancillary therapies.

ADVANCED LEAK COMPENSATION

VOCSN automatically compensates for high flows and large leaks up to 75 L/min at 20 cmH₂O. This reduces nuisance alarms and allows the use of more comfortable noninvasive masks.

INTEGRATED OXYGEN BLENDING AND MONITORING

VOCSN includes an internal oxygen concentrator as well as inlets for low and high pressure oxygen sources. An onboard FiO₂ monitor displays and tracks oxygen delivery and together with the onboard oxygen blender, allows you to set precise high pressure oxygen delivery. If external oxygen becomes disconnected, VOCSN activates an alarm and allows you to easily switch to the internal concentrator, providing an emergency backup source of oxygen.

Ventilation Tech Specs

Controls

6 Modes of Ventilation

- Spontaneous
- Bi-Level (including functionality similar to timed back-up S/T, AVAPS®, timed ventilation, and BiPAP® functions as well as volume targeted functionality similar to PRVS)
- Assist/Control-Pressure (including volume targeted functionality similar to PRVC)
- Assist/Control-Volume
- SIMV-Pressure (including CPAP and volume targeted functionality)
- SIMV-Volume

Apnea Rate

- 4 to 60 BPM

Breath Rate

- 0 to 60 BPM

Circuit Compensation

- Automatic circuit compensation

Customizable Ventilation Therapy Pre-sets

- 3 pre-sets, customizable name and settings

EPAP/PEEP

- Active circuit: 0 to 25 cmH2O
- Passive circuit: 4 to 25 cmH2O

FiO2

- 21 to 100%

Flow Cycle

- 10 to 90%

Flow Trigger

- Active or Passive Circuit: 0.5 to 9.0 L/min
- Mouthpiece circuit: 0.5 to 3.0 L/min (breaths are triggered by patient effort or by simply placing your mouth on the mouthpiece)

Inspiratory Positive Airway Pressure (IPAP)

- 4 to 40 cmH2O above ambient

Inspiratory Time

- 0.3 to 5.0 seconds

Leak Compensation

- On/Off
- Automatic leak compensation up to 75 L/min at 20 cmH2O

Pressure Control

- 1 to 50 cmH2O above PEEP (PEEP compensated)

Pressure Control Flow Termination

- On/Off

Pressure Support

- 0 to 40 cmH2O above PEEP (PEEP compensated)

Rise Time

- 1 (100 ms) to 6 (600 ms) to target 67% of set pressure

Sigh

- On/Off
- 150% of the prescribed volume is delivered once every 100 breaths

Tidal Volume

- 50 to 1500 mL

Time Cycle

- 0.3 to 3.0 seconds

Monitors

Airway Pressure Manometer

- 0 to 80 cmH2O

Breath Rate

- 0 to 100 BPM

Calculated FiO2

- 21 to 100%
- The calculated FiO2 monitor calculates the delivered FiO2 during pulse dose oxygen

Exhaled Tidal Volume

- 0 to 2000 mL

FiO2 Monitor

- 15 to 95%, >95%

Graphic Waveforms

- Pressure (-16 to 80 cmH2O)
- Flow (±120 L/min)
- Volume (0 to 2000 mL)

I:E Ratio

- 9.9:1 to 1:9.9

Leak

- 0 to 100 L/min

Mean Airway Pressure

- 0 to 50 cmH2O

Minute Volume

- 0 to 60 L

Positive End Expiratory Pressure (PEEP)

- 0 to 45 cmH2O

Peak Inspiratory Pressure (PIP)

- 0 to 85 cmH2O

Ventilation Tech Specs (continued)

Alarms

Apnea

- Off, 10 to 120 seconds

Battery Alarms

- Battery Use Alarm
- Internal Battery Low
- Internal Battery Critically Low

Circuit Integrity Alarms

- Check Patient Circuit
- Patient Circuit Disconnect

Device Alarms

- Device Maintenance
- Inoperative Alarm
- System Fault

High Breath Rate

- Off, 10 to 99 BPM

High FiO2

- Off, 24 to 99%

High Minute Volume

- Off, 1 to 59 L

High PEEP

- Off, 3 to 20 cmH2O above set PEEP

High Pressure

- 10 to 80 cmH2O

High Pressure Alarm Delay

- None, 1 to 2 breaths

Low Breath Rate

- Off, 4 to 80 BPM

Low FiO2

- Off, 19 to 92%

Low Inspiratory Pressure

- Off, 1 to 40 cmH2O

Low Minute Volume

- Off, 0.1 to 50 L

Low PEEP

- Off/On
- When on, automatically activates when monitored PEEP falls 5 cmH2O below the set PEEP

Very Low FiO2

- FiO2 less than 18%

Ventilation Therapy Tracker

- Logs changes to ventilation settings



Oxygen

The VOCSN internal oxygen concentrator and Oxygen Direct™ system deliver the equivalent of 6 L/min of oxygen. External oxygen sources can be connected when needed.

VOCSN can deliver the equivalent of 6 L/min of oxygen using the onboard internal oxygen concentrator.

The Oxygen Direct™ system uses an independent oxygen tube inside the circuit. This enables oxygen to be delivered directly to the patient in pulse dose mode during the beginning part of the breath, precisely when the patient needs oxygen most.

The oxygen system is up to three times more efficient than stationary concentrators. This significantly decreases the size of the oxygen concentrator and maximizes battery life. Most importantly, it makes traveling and using oxygen easier.



Highlighted Technology

INTERNAL OXYGEN CONCENTRATOR

The internal oxygen concentrator produces the equivalent of up to 6 L/min or up to 40 percent oxygen in adult patients. The redesigned pressure swing adsorption process and Oxygen Direct™ system mean more oxygen is generated using less battery power.

ONBOARD FIO2 MONITOR

The VOCSN onboard FIO2 monitor verifies accurate oxygen delivery.

EXTERNAL OXYGEN SOURCES

VOCSN may include low pressure and high pressure ports for external oxygen. If external oxygen becomes disconnected, VOCSN activates an alarm and allows you to switch to the internal concentrator, providing an emergency backup source of oxygen.

INTEGRATED OXYGEN BLENDER

VOCSN includes an integrated oxygen blender to set precise FIO2 delivery when using external high pressure sources.

Oxygen Tech Specs

Oxygen Source

Internal Concentrator

- Pulse Dose Mode equivalent to 0.5 to 6.0 L/min
- Oxygen bolus is delivered during the first 62% of breath volume

External Oxygen Sources

- Low Pressure port (external concentrators)
- High Pressure port (for tanks and in-wall)

Oxygen Mode

- Pulse Dose (internal and external high pressure)
- FiO2 (external high pressure)

Oxygen Monitors

- FiO2 Monitor (for use with FiO2 mode and with external high pressure)
- Calculated FiO2 Monitor (monitor appears when providing pulse dose oxygen)

Oxygen Sensors

- Integrated oxygen sensor to check oxygen generation from the concentrator
- Integrated oxygen sensor to measure oxygen flowing into the circuit from external sources

Battery Alarms

- Battery Use Alarm
- Internal Battery Low
- Internal Battery Critically Low

Device Alarms

- O2 Concentration
- High/Low/Very Low FiO2
- System Fault
- Inoperative Alarm

Oxygen Therapy Tracker

- Logs when oxygen is turned on or off or settings are changed



Cough

Touch Button Cough™ therapy can be activated in seconds, without changing the circuit.

By unifying ventilation, cough, and suction into one system, it now takes seconds instead of minutes to administer cough therapy with Touch Button Cough™. The Ventec One-Circuit™ features a patent pending high flow valve design, allowing patients to use the same circuit for ventilation and cough. Using the Cough + Suction feature, the suction is activated during the cough therapy to clear secretions. Patients using invasive ventilation can use the Secretion Trap™ to easily clear secretions from the circuit. Once the set number of cough cycles is complete, ventilation automatically resumes.

Touch Button Cough™: The VOCSN cough is activated with the touch of a button to make airway clearance easy. Patients remain connected to the ventilator at all times, and there is no need to disconnect circuits between uses. The system is designed to reduce the gaps in ventilation, decrease the risk of patient misconnection, and minimize exposure to the patient's airway.



Highlighted Technology

ADVANCED COUGH RISE TIME

The VOCSN uses an advanced rise time algorithm during cough. The system is designed to reduce the amount of mucus going back to the patient.


COUGH + SUCTION

When the Cough + Suction feature is enabled, VOCSN will automatically activate the suction therapy to facilitate easy secretion clearance.

BREATH SYNC

When Breath Sync is enabled, VOCSN monitors patient breathing and triggers a cough at a natural point in the breathing cycle. The technology allows the patient to transition gently in and out of the cough therapy and seamlessly return to ventilation.

Transitions Between Ventilation and Cough Therapy

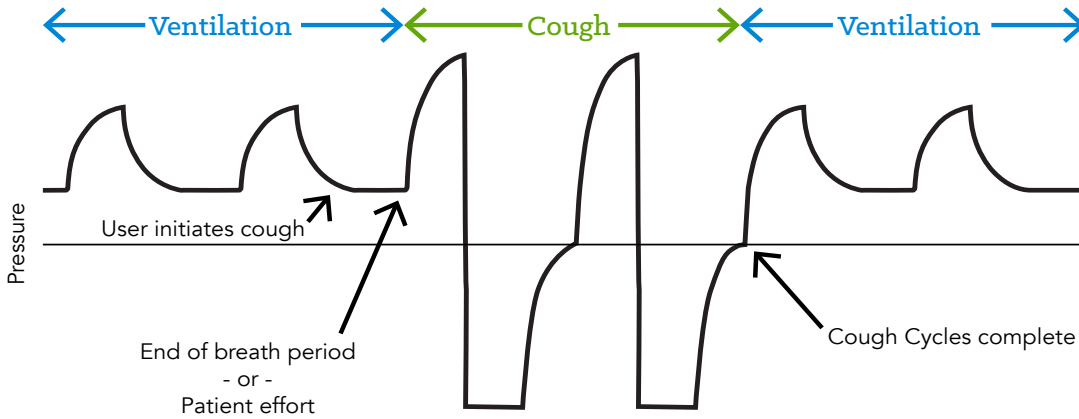

Cough Tech Specs

Controls

Cough Cycles

- 1 to 10

Cough + Suction

- On/Off

Exsufflation Pressure

- -10 to -70 cmH2O

Exsufflation Time

- 0 to 5.0 Seconds

Insufflation Pressure

- 10 to 70 cmH2O

Insufflation Rise Time

- 1 to 6

Insufflation Time

- 0 to 5.0 seconds

Pause Time

- 0 to 5.0 seconds

Cough Presets

- 3 customizable presets

Monitors

Cough Airway Pressure Manometer

- -80 to +80 cmH2O

Cough Cycle Monitor

- 0 to 10

Cough Volume Monitor

- 0 to 4000 mL

Peak Cough Flow Monitor

- 0 to 350 L/min

Cough Therapy Tracker

- Logs when cough therapy is turned on or off or settings are changed

Suction

The quiet hospital grade suction system that is easy to transport.

The VOCSN high flow suction provides quiet and effective airway clearance. Working in conjunction with the Secretion Trap, suction can be used to clear secretions from the patient's airway. VOCSN ensures consistent and precise vacuum pressure to quickly clear mucus. Plus, the suction system uses Ventec's unique sound muffler, making it more than three times quieter than traditional suction machines.



Highlighted Technology

COUGH + SUCTION

VOCSN activates the suction system during the cough therapy. Caregivers can activate a cough, clear the mucus, and return to ventilation in less than one minute.

TRAVEL SUCTION CANISTER

The 300 mL detachable Travel Suction Canister allows suction on the go. This size also supports emergency responders and transport.

EXTERNAL SUCTION CANISTER ADAPTER

The external suction canister adapter connects to the side of VOCSN to enable suction therapy with VOCSN while connected to any third party external suction canister.

VENTEC SECRETION TRAP

The suction system removes mucus from the circuit simplifying mucus management. The system allows invasive patients to remain connected to the same circuit during ventilation, suction, and cough therapies.

CONSISTENT HIGH FLOW TECHNOLOGY

The three piston compressor pump provides consistent high flow suction. The VOCSN suction system is capable of generating 35 L/min of flow at 450 mmHg to easily manage the removal of difficult secretions.

Suction Tech Specs

Controls

Supported Suction Interfaces

- Suction tubing and oral care tools
- Open Suction Catheters
- Closed (in-line) Suction Catheters

Suction Canister

- 300 mL integrated travel canister
- 1200 mL canister for hospital and home use

Vacuum Control

- -95 to -450 mmHg
- Default setting

Vacuum System

- Customized three-cylinder piston pump

Monitors

Vacuum Monitor

- 0 to -550 mmHg

Suction Therapy Tracker

- Logs when suction therapy is turned on or off or when settings are changed



Nebulizer

VOCSN records each medication use and turns off the nebulizer when the therapy is complete.

VOCSN provides an integrated 6 L/min nebulizer drive to make medication delivery seamless. VOCSN automatically compensates the airflow from the ventilator when the nebulizer drive is active to ensure accurate ventilation. Alternatively, External Nebulizer Compensation provides the same adjustment when used with an external nebulizer. The VOCSN nebulizer is battery operated for use on the go. Plus, VOCSN records data about each treatment and turns off the nebulizer (or nebulizer compensation) once the therapy is complete.



Highlighted Technology

NEBULIZER NOISE MUFFLER

The system uses Ventec's unique sound muffler technology and is half the noise of traditional nebulizer systems.

THERAPY TRACKER

Each use of the nebulizer is recorded in the event log to help ensure medication compliance.

PROGRAMMABLE AUTO-OFF

The nebulizer automatically turns off following completed use.

EXTERNAL NEBULIZER COMPENSATION

In addition to providing internal Nebulizer therapy, VOCSN can compensate for the flow from an external nebulizer.

Nebulizer Tech Specs

Nebulizer Duration

- 5 to 60 minutes, 1 minute increments

Nebulizer System

- Three piston pump for steady flow

Nebulizer Therapy Tracker

- Logs when nebulizer therapy is turned on or off or settings are changed



About Ventec Life Systems

Ventec Life Systems is defining integrated respiratory care to improve patient outcomes and reduce caregiver challenges in the hospital and home. Ventec's leading product, VOCSN, seamlessly integrates five separate devices including a ventilator, oxygen concentrator, cough assist, suction, and nebulizer into one unified respiratory system. The team's history of patient-centric design brings care changing innovations to life for patients, medical professionals, and caregivers.

For questions about VOCSN:



VentecLife.com
info@ventecLife.com
1-844-MY-VOCSN

MKT-00001 Rev F